Unleash The Power of TANGENT

TANGENT 100

Low frequency driver: K-2-K woofer, 8" (20 cm), 20 oz. (.567 kg) magnet
High frequency driver: K-74-K, 1" (2.54 cm), ferro fluid-cooled compression driver, 5.6 oz. (.159 kg) magnet
Sensitivity: 93 dB SPL one watt, one meter
Power handling: 100 watts continuous, 500 watt music peaks
Response: 42 Hz - 20 kHz ± 3 dB
Suggested amplifier rating: 20 watt per channel minimum
Impedance: 8Ω nominal
Crossover frequency: 1.8 kHz
Height: 19-3/4" (50.2 cm)
Width: 12-1/4" (31.1 cm)
Depth: 10-1/2" (26.7 cm)
Weight: 21 lbs. (9.55 kg) each

TANGENT 200

Low frequency driver: K-2-K woofer, 8" (20 cm), 20 oz. (.567 kg) magnet
High frequency driver: K-74-K, 1" (2.54 cm), ferro fluid-cooled compression driver, 5.6 oz. (.159 kg) magnet
Sensitivity: 93 dB SPL one watt, one meter
Power handling: 100 watts continuous, 500 watt music peaks
Response: 38 Hz - 20 kHz ± 3 dB
Suggested amplifier rating: 20 watt per channel minimum
Impedance: 8Ω nominal
Crossover frequency: 1.8 kHz
Height: 25-1/4" (64.1 cm)
Width: 12-3/4" (32.4 cm)
Depth: 11-1/2" (29.2 cm)
Weight: 26 lbs. (57 kg) each

TANGENT 300

Low frequency drivers: Two K-3-K woofers, 8" (20 cm), 20 oz. (.567 kg) magnet
High frequency driver: K-80-K, 1" (2.54 cm), ferro fluid-cooled compression driver, 14 oz. (.397 kg) magnet
Sensitivity: 96 dB SPL one watt, one meter
Power handling: 125 watts continuous, 625 watt music peaks
Response: 38 Hz - 20 kHz ± 3 dB
Suggested amplifier rating: 20 watt per channel minimum
Impedance: 8Ω nominal
Crossover frequency: 1.8 kHz
Height: 31-1/2" (80 cm)
Width: 13-1/2" (34.3 cm)
Depth: 12-1/4" (31.1 cm)
Weight: 37 lbs. (17 kg) each

TANGENT 400

Low frequency driver: K-24-K woofer, 12" (30.48 cm), 20 oz. (.567 kg) magnet
Midrange frequency driver: K-53-K, 1-1/2" (3.8 cm) compression driver
High frequency driver: K-76-K, 1" (2.54 cm), ferro fluid-cooled compression driver, 5.6 oz. (.159 kg) magnet
Sensitivity: 97 dB SPL one watt, one meter
Power handling: 125 watts continuous, 625 watt music peaks
Response: 38 Hz - 20 kHz ± 3 dB
Suggested amplifier rating: 20 watt per channel minimum
Impedance: 8Ω nominal
Crossover frequency: 700 Hz and 6 kHz
Height: 35-1/2" (88.9 cm)
Width: 15" (38.1 cm)
Depth: 14-1/4" (36.2 cm)
Weight: 45lbs. (20.5 kg) each

TANGENT 500

Very low frequency driver: KD-13 passive radiator, 12" (30.5 cm)
Low frequency driver: K-24-K woofer, 12" (30.5 cm), 30 oz. (.85 kg) magnet
Midrange frequency driver: K-53-K, 1-1/2" (3.8 cm) compression driver
High frequency driver: K-76-K, 1" (2.54 cm), ferro fluid-cooled compression driver, 5.6 oz. (.159 kg) magnet
Sensitivity: 97 dB SPL one watt, one meter
Power handling: 150 watts continuous, 750 watt music peaks
Response: 35 Hz - 20 kHz ± 3 dB
Suggested amplifier rating: 20 watt per channel minimum
Impedance: 8Ω nominal
Crossover frequency: 700 Hz and 6 kHz
Height: 40-1/2" (102.9 cm)
Width: 15-1/2" (39.4cm)
Depth: 14-5/8" (37 cm)
Weight: 51 lbs. (23.1 kg) each

Tangent® by klipsch

Unleash The Power

P.O. Box 688 • Hope, AR USA 71801

MADE IN THE U.S.A.
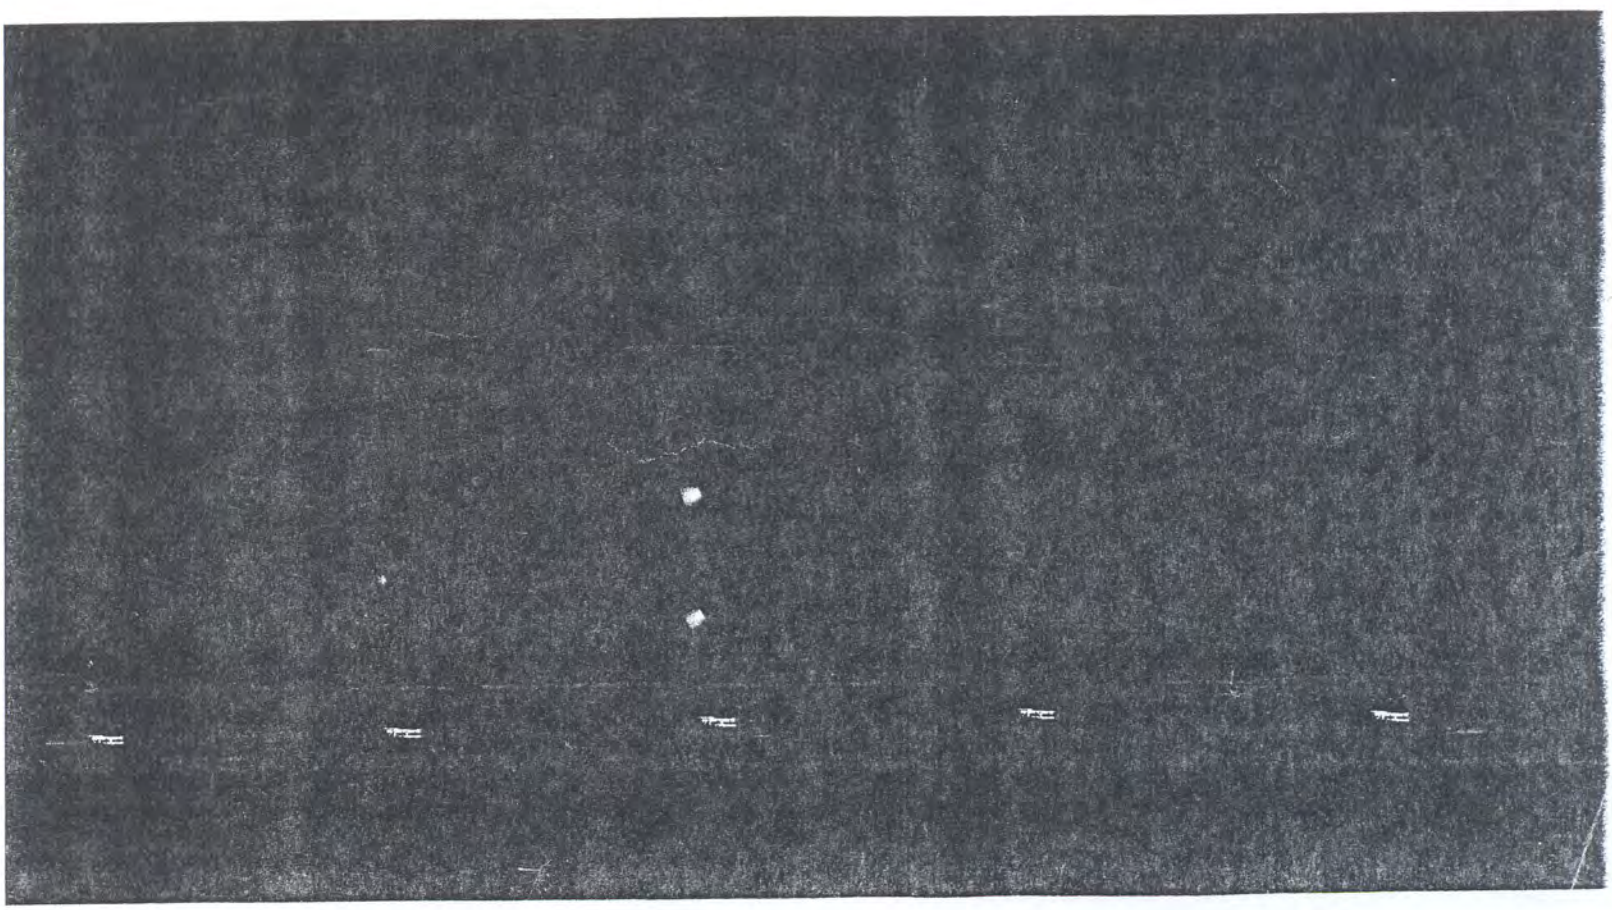
190012
PS 592 10K